





# Model: RNP - 35

Rigid Neck Paver

Overall Length	Overall Width	Gooseneck Length	Deck Length	Deck Height	Rear Length	Rear Height	Ground Clearance
53'	8' 6"	9'	33'	34'	N/A	N/A	N/A

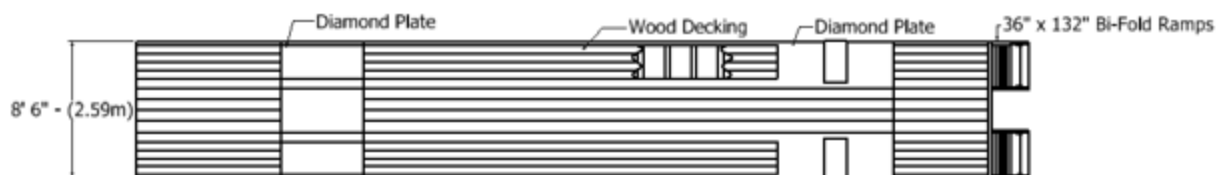

Standard Trailer Dimensions

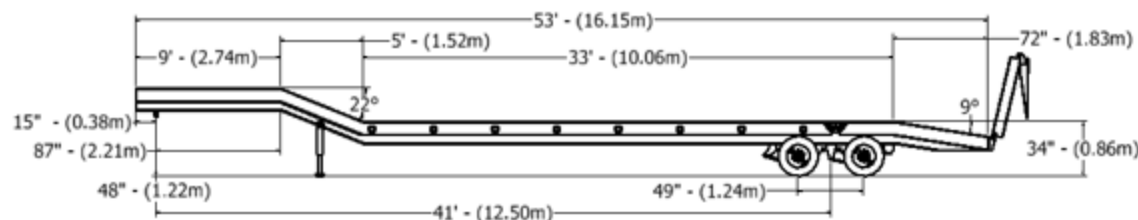

Weight Capacity 70,000 lbs.

GVWR

Gooseneck	
King Pin Style	Fixed
King Pin Setting	15"
Swing Clearance	87"
5 <sup>th</sup> Wheel Height	48"
King Pin	2"
Ride Height Adj.	N/A

Axle, Suspension, & Running Gear	
# of Axles	2 Spring Suspension Axles
Axle Spacing	49"
Axle Capacity	25,000 lbs.
Brakes	12.25" x 7.5" – 25,000 lbs.
ABS	2S / 1M

Main Deck	
Main Beam	W16x57 Beams A572 Grade 50
Centers	40" Standard
Side Beams	C10x15.3
Crossmembers	W8x10 A992 Grade 50
Spacing	24" Standard
Outriggers	N/A
# of D-Rings	4 per Side
Front Ramps	N/A
Concentrated Load	70,000 lbs. (Within a 16' Span)

Decking / Flooring	
Main Decking	2" Oak Lumber

Wheel Assembly	
Tires	215 / 75R 17.5
Rims	8.25 x 17.5 Steel Wheels

Tail Section	
Beavertail	72"

Electrical	
Lights	Sealed Modular Wire Harness
Connector	7 Way Connector

Finish	
Anticorrosive Undercoat – 2 Coats Epoxy Primer	
2 Coats Gloss Acrylic Enamel Top Coat	
Mud Flaps & Reflective Tape	

Ramps	
36" x 132" Electric Over Hydraulic Bi-Fold Ramps	

Popular Options	
Additional Axle	
Additional Deck Length	
Additional D-Rings	
Air Ride Suspension w/ Lift Axle	
Lockable Storage	
Manual Height Control	
Multi-Function LED Strobe	
Rub Rail w/ Stake Pockets	
Outriggers 14 per Side	
Winch Kit	

For additional information on your Witzco Challenger Trailer contact the dealer nearest you.

Call: (941) 922 – 5301 \* Toll Free: 1-888-922-9900 \* info@witzco.com