




Model: NGB - 60

Non-Ground Bearing Removable Gooseneck

Overall Length	Overall Width	Gooseneck Length	Deck Length	Deck Height	Tail Length	Tail Height	Ground Clearance
48' 6"	8' 6"	11' 6"	22'	25"	15'	40"	9"

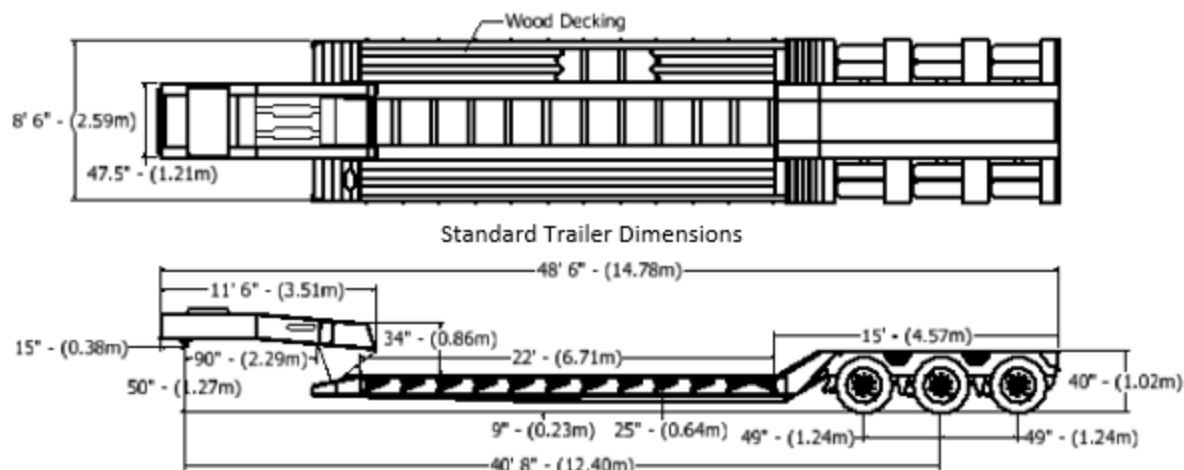

Standard Trailer Dimensions

Weight 23,340 lbs. Capacity 120,000 lbs.

GVWR 143,340 lbs.

Gooseneck

Axle, Suspension, & Running Gear

King Pin Style	Fixed
King Pin Setting	15"
Swing Clearance	90"
5 th Wheel Height	50"
King Pin	2"
Ride Height Adj.	4 Position

# of Axles	3 Spring Suspension Axles
Axle Spacing	49"
Axle Capacity	25,000 lbs.
Brakes	16 1/2" x 7" - 25,000 lbs.
ABS	Optional

Main Deck

Decking / Flooring

Main Beam	W16x100 Beams A992 Grade 50
Centers	40" Standard
Side Beams	W16x26 A992 Grade 50
Crossmembers	W8x10 A992 Grade 50
Spacing	24" Standard
Outriggers	12" Cast Iron, 12 Each Side
# of D-Rings	3 per Side
Front Ramps	Optional
Concentrated Load	120,000 lbs. (Within a 16' Span)

Main Decking	2" Oak Lumber (Open Center)
--------------	-----------------------------

Wheel Assembly

Tires	255 / 70R x 22.5
Rims	8.25 x 22.5 Steel Wheels

Finish

Anticorrosive Undercoat	- 2 Coats Epoxy Primer
	2 Coats Gloss Acrylic Enamel Top Coat
Mud Flaps & Reflective Tape	

Popular Options

Riser	30"
Electrical	
Lights	Sealed Modular Wire Harness
Connector	7 Way Connector

Additional Deck Length	up to 28'
Air Ride Suspension	w/ Lift Axle
Aluminum Wheels	
Apitong Wood Decking	
Beavertail	w/ Ramps
Bucketwell	
Combo Wet Line Power System	
Covered Wheels	(Welded or Removable)
Flush Bed Hooks	
T-1 100ksi	(Main Frame)

Hydraulics

Cylinder	(2) 8" Bore w/ 22" Stroke
Control Value	2,500 psi
Engine	13 HP Electric Start - Pump: 1 GPM

For additional information on your Witzco Challenger Trailer contact the dealer nearest you.

Call: (941) 922 - 5301 * Toll Free: 1-888-922-9900 * info@witzco.com